



## Light spread:

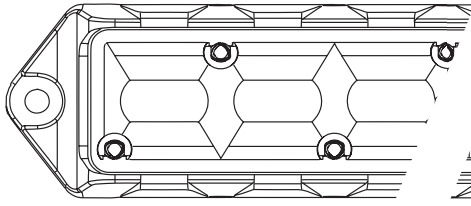

40° Light spread

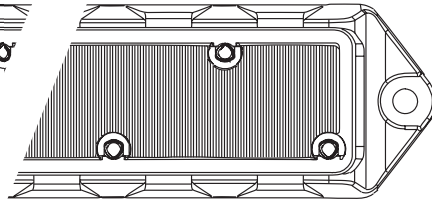

180° Light spread

## Color Specifications:

Red    Blue    Amber    White    Green

## Single color patterns

Single Slow
Single Fast
Single Combo
Double Slow
Double Fast
Double Combo
Quad Slow
Quad Fast
Quad Combo
Split-Single Slow
Split-Single Fast
Split-Single Combo
Split-Double Slow
Split-Double Fast
Split-Double Combo
Split-Quad Slow
Split-Quad Fast
Split-Quad Combo
Brake Pop
Steady On

## Dual color patterns

Color 1- Quad Combo
Color 2- Single Slow
Color 2- Single Fast
Color 2- Single Combo
Color 2- Double Slow
Color 2- Double Fast
Color 2- Double Combo
Color 2- Quad Slow
Color 2- Quad Fast
Color 2- Quad Combo
Color 1&2 / No Off Time- Single Slow
Color 1&2 / No Off Time- Single Fast
Color 1&2 / No Off Time- Single Combo
Color 1&2 / No Off Time- Double Slow
Color 1&2 / No Off Time- Double Fast
Color 1&2 / No Off Time- Double Combo
Color 1&2 / No Off Time- Quad Slow
Color 1&2 / No Off Time- Quad Fast
Color 1&2 / No Off Time- Quad Combo
Color 1&2 /Off Time- Single Slow
Color 1&2 /Off Time- Single Fast
Color 1&2 /Off Time- Single Combo
Color 1&2 /Off Time- Double Slow
Color 1&2 /Off Time- Double Fast
Color 1&2 /Off Time- Double Combo
Color 1&2 /Off Time- Quad Slow
Color 1&2 /Off Time- Quad Fast
Color 1&2 /Off Time- Quad Combo
Color 1- Brake Pop
Color 2- Brake Pop
Color 1- Steady On
Color 2- Steady On

## Dual color patterns

Color 1- Single Slow
Color 1- Single Fast
Color 1- Single Combo
Color 1- Double Slow
Color 1- Double Fast
Color 1- Double Combo
Color 1- Quad Slow
Color 1- Quad Fast

## Wiring Diagram and Instructions:

**1.** To activate the unit, extend the red (+) or yellow (+) wire to a 12V post. Extend the black (-) wire to the ground post of the vehicle's battery. Please note that mode 2 overrides mode 1.


**2.** Momentarily connect the blue wire to the Ground (12V-) to cycle through the flash patterns.

**3.** Synchronization: To Sync two or more light heads together:

**A.** Apply 12V+ power to the red or yellow (+) wire and apply 12V- to black wire to power the unit on.

**B.** Cycle through all patterns by tapping the blue (flash pattern changer) wire to the activated black ground wire until the steady burn pattern is selected.

**C.** Connect one of the same colored mode wires (red or yellow) of the two light heads together; connect the black wires of the light heads together and then connect the blue wires of the light heads together.

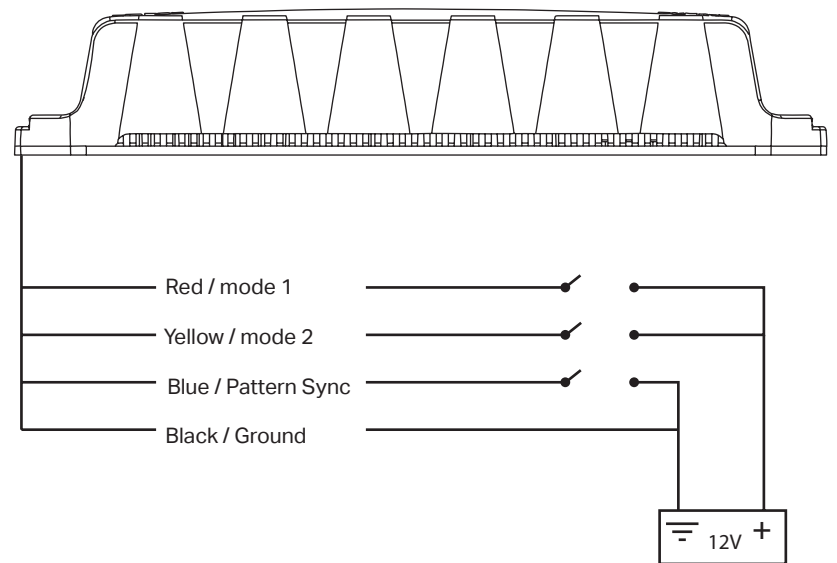

## Alternate Light Heads:

**D.** Follow steps A-B.

**E.** For the light heads to alternate, one light head must be set as master and the other as slave on the mode wire intended for use. To do so, hold the blue (flash pattern changer) wire to ground for 3 seconds. If all LEDs turn on this indicates master mode. If half of the LEDs activate this indicates slave mode.

**F.** Follow step C. Change patterns by tapping the blue wire to the activated black ground wire.